

ELOTOP


Roller plaster type RP

Art. 06 / 2 / 0123

VFL
Vismara Farbladen



Properties	ELOTOP roller plaster type RP is a water-dilutable, plastic-bound plastering compound for exterior and interior use with a fine grain size of up to 0,5mm. ELOTOP is durable, breathable, shock and impact resistant. The good durability of ELOTOP allows high layer thicknesses to be applied in one step, thereby smoothing out patches, minor unevenness or hairline cracks.
Field of application	As a decorative plastering compound for exterior and interior use on walls and ceilings. ELOTOP is suitable for use on mineral substrates such as cement, lime or plastic plasters, masonry, exposed concrete, gypsum, cement-fibre boards, wood and polystyrene.
Pretreatment	The substrate must be clean, dry and load-bearing. Old coatings must be cleaned (GEIGER SE-1 leachers / PUROL active cleaner concentrate) and tested for adhesion. Fix untreated, absorbent, chalky or sandy substrates with a deep penetrating primer for the time being.
Processing	Do not use below 8 °C. ELOTOP is preferably applied twice using a roller. Depending on the type of roller, it gives a fine (short hair) or coarse (lambskin) structure.
System structure	1 x BLEND [®] -XIT , DUROX deep penetrating primer or ELOTOP plaster primer concentrated W02 2 x ELOTOP roller plaster type RP 1 x Top coat with all common interior paints such as DUROVIT, DUROLAN, DUROXAN, DUROSAN, ELOSAN, etc. or corresponding facade paints such as DUROSIL, DUROMAT, ELOSOL, etc.
Drying	◆ Firm to the touch after 2–3 hours ◆ Can be reworked after approx. 12 hours (depending on the temperature, application quantity, humidity and air circulation)
Dilution	ELOTOP is adjusted ready for use. For special applications it can be diluted with water.
Extensiveness	400–500g per m ² and application, depending on the type of roller.
Application	Roller In order to achieve optimum results, it is very important to use the right tools – see KNUCHEL GUIDE on brush and roller qualities. You will find this guide both in the catalogue and on the homepage as an attachment to this product.
Cleaning	Clean tools with warm water immediately after use.
Delivery form	Packages of 25, 12 and 6 kg.
Shelf life	ELOTOP can be stored for at least 18 months in the well closed original container. Store in a cool but frost-free place. Diluted material reduces the shelf life, depending on the degree of dilution and water quality.

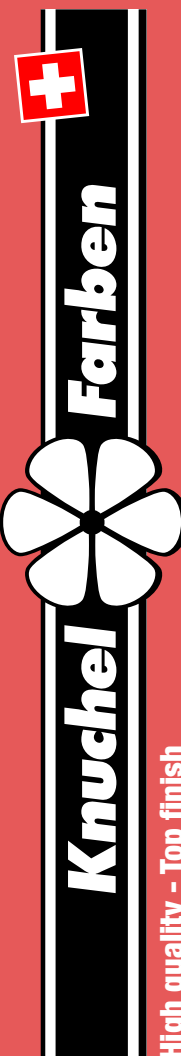

Viscosity	High viscosity / 10500–11500 mPa.s
Solid content	82 ± 1 %
Binder base	Acrylic copolymer
Pigment base	Titanium dioxide
Fillers	Mineral fillers
Gloss level	Matt
Grit size	≥ 0,5 mm
Colours	Natural white
Registration	CPID 279265
Classification	For information on chemical properties and hazards as well as regulations regarding transport, processing, storage, disposal, etc., please refer to the safety data sheet.
Note	<p>This leaflet is only intended as a reference and non-binding advice. The processing must be adapted to the corresponding conditions. In special cases we recommend to contact our technical service. However, all data and information on the suitability and application of the delivered products do not exempt the processor from carrying out his own tests and trials. A claim for damages for omitted, incomplete or incorrect information is excluded. This applies in particular also if other products are used in the paint build-up system.</p> <p>Furthermore, we refer to our General Terms and Conditions (GTC) on our homepage.</p>