

KADOR

Facade matt paint 15P

Art. 262 / 2 / 0123

VFL
Vismara Farbladen



Properties

KADOR is a solvent-based, breathable and frost-resistant Pliolit facade paint for exterior and interior applications. The cloth-matt coatings are outstandingly weather-resistant, chalking-free, extremely permeable to water vapour and resistant to saponification and yellowing. KADOR has excellent adhesion to old and new coatings, high penetration and good covering and insulating properties. KADOR gives a streak-free and cloth-matt surface finish and does not provide a breeding ground for algae and mould, actively protecting the coating from their infestation. KADOR can also be processed at temperatures around 0 °C, where filming damage is to be expected with water-dilutable systems.

Field of application

As a facade paint or as a cloth-matt, breathable interior paint. Especially as a winter façade paint where filming damage is to be expected with other systems. KADOR is suitable for all mineral substrates such as cement, lime or plastic plasters, masonry, exposed concrete, gypsum, cement-fibre boards as well as on old dispersion and mineral coatings.

KADOR can be used in admixture with DUROX deep penetrating primer (1 : 1) for priming highly absorbent lime-cement plasters and a subsequent dispersion coating.

Pretreatment

The substrate must be clean, dry and load-bearing. However, prior testing of the load-bearing capacity of the substrate is essential. Residues of glue and Blanc-Fix coatings that still adhere well can be reworked directly.

Freshly applied plastic, silicone or mineral plasters must be thoroughly dry before painting over, otherwise stress cracks may occur.

Processing

KADOR is insensitive to frost and can also be applied around sub-zero temperatures, provided the substrate is dry and free of ice. The material to be applied should be at room temperature to ensure good flow. However, any freezing temperatures at night will not harm the coating. Avoid direct sunlight.

System structure

New construction on untreated substrates

1 x KADOR facade matt paint 15P 30–50 % diluted with DUROX deep penetrating primer colourless

2 x KADOR facade matt paint 15P in the desired shade

Renovation on intact old coats

2 x KADOR facade matt paint 15P in the desired shade

Drying

- ◆ Dust dry after about 30 minutes
- ◆ Firm to the touch after 1–2 hours
- ◆ Can be painted over after about 12 hours
(depending on the temperature, application quantity and humidity)

Dilution


Synthetic resin thinner or Sangayol (turpentine substitute).

Extensiveness


6–8 m² per kg per application, depending on the quantity applied and the condition of the substrate.

Application

Brush, roller or spray gun.

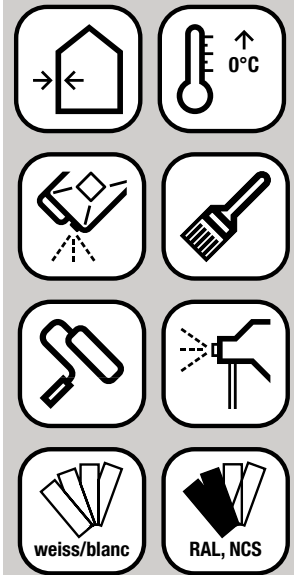

Farben



Knuchel

High quality - Top finish

In order to achieve optimum results, it is very important to use the right tools – see KNUCHEL GUIDE on brush and roller qualities. You will find this guide both in the catalogue and on the homepage as an attachment to this product.

Cleaning	Clean tools immediately after use with paint or cleaning thinner.
Delivery form	Packages of 25, 12 and 6 kg as well as 750ml.
Shelf life	KADOR can be stored for at least 18 months in the well closed original container.
Viscosity	Slightly thixotropic / 3510–4510 mPa.s
Density	1,44 ± 0,05 g/cm ³
Solid content	71 ± 1 %
Binder base	Acrylic copolymer
Pigment base	Titanium dioxide, inorganic light- and weather-resistant colored pigments.
Gloss level	cloth mat
Colours	White and pastel colours according to RAL, NCS or template.
Registration	CPID 279841
Classification	For information on chemical properties and hazards as well as regulations regarding transport, processing, storage, disposal, etc., please refer to the safety data sheet.
Note	<p>This leaflet is only intended as a reference and non-binding advice. The processing must be adapted to the corresponding conditions. In special cases we recommend to contact our technical service. However, all data and information on the suitability and application of the delivered products do not exempt the processor from carrying out his own tests and trials. A claim for damages for omitted, incomplete or incorrect information is excluded. This applies in particular also if thinners and other products are used in the paint build-up system.</p> <p>Furthermore, we refer to our General Terms and Conditions (GTC) on our homepage.</p>