

# BRILALIT


## Dive ground LH-367

Art. 367 / 1 / 1222


VFL  
Vismara Farbladen



<b>Properties</b>	BRILALIT dive ground LH-367 is a pigmented, solvent-containing special alkyd resin varnish with moisture regulating effect. BRILALIT has a high degree of elasticity and penetration, allowing the natural contraction and expansion of the wood to occur without cracking or loss of adhesion. BRILALIT is also characterized by excellent flow, high opacity and good edge coverage combined with fast sandability.
<b>Field of application</b>	BRILALIT dive ground LH-367 is suitable for priming woodwork such as windows, shutters, facades, wooden shingles, soffits, garden fences, garage doors and all kinds of wooden goods.
<b>Pretreatment</b>	The wood to be treated must be clean, dry (not more than 15 % wood moisture), free of wax and resin.
<b>Processing</b>	Do not use below 8 °C. Subsequent intermediate sanding with 180–220 grit should be carried out.
<b>System structure</b>	1 x BRILALIT dive ground LH-367 BRILALIT can be painted over with all commercial solvent-based and water-based alkyd and acrylic PU systems.
<b>Drying</b>	<ul style="list-style-type: none"><li>◆ Dust dry after 1–2 hours</li><li>◆ Firm to the touch after 2–3 hours</li><li>◆ Sandable and recoatable after approx. 12 hours (depending on the temperature, application quantity and humidity)</li></ul>
<b>Dilution</b>	BRILALIT is adjusted ready for use. If nevertheless necessary, dilute with turpentine substitute (Sangayol) or synthetic resin thinner. For spraying or dipping dilute with synthetic resin or universal thinner.
<b>Extensiveness</b>	7–9 m <sup>2</sup> per kg per application, depending on the quantity applied and the condition of the substrate.
<b>Application</b>	Immersion bath, sprayer, roller or brush. In order to achieve optimum results, it is very important to use the right tools – see KNUCHEL GUIDE on brush and roller qualities. You will find this guide both in the catalogue and on the homepage as an attachment to this product.
<b>Cleaning</b>	Clean tools immediately after use with paint or cleaning thinner.
<b>Delivery form</b>	Packages of 23 and 5,5 kg as well as 750ml.
<b>Shelf life</b>	BRILALIT can be stored for at least 18 months in the well closed original container. Store in a cool and dry place.
<b>Viscosity</b>	Slightly thixotropic / 40–45 seconds DIN 4mm
<b>Density</b>	1,23 ± 0,05 g/cm <sup>3</sup> (white)

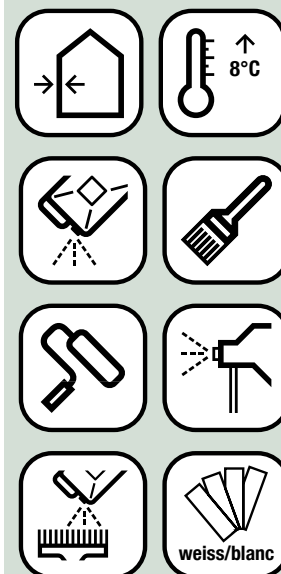

Farben



Knuchel

High quality - Top finish

<b>Solid content</b>	60 ± 1 %
<b>Binder base</b>	Modified long oil alkyd resins
<b>Gloss level</b>	Matt
<b>Colours</b>	White
<b>Registration</b>	CPID 611671
<b>Classification</b>	For information on chemical properties and hazards as well as regulations regarding transport, processing, storage, disposal, etc., please refer to the safety data sheet.
<b>Note</b>	<p>This leaflet is only intended as a reference and non-binding advice. The processing must be adapted to the corresponding conditions. In special cases we recommend to contact our technical service. However, all data and information on the suitability and application of the delivered products do not exempt the processor from carrying out his own tests and trials. A claim for damages for omitted, incomplete or incorrect information is excluded. This applies in particular also if thinners and other products are used in the paint build-up system.</p> <p>Furthermore, we refer to our General Terms and Conditions (GTC) on our homepage.</p>