

# BLENDA<sup>®</sup>-TEX

Art. 464 / 2 / 0223

## Plaster blocking primer H02

VFL  
Vismara Farbladen



### Properties

BLENDA<sup>®</sup>-TEX is a water-dilutable, fine-grained, alkali-resistant and white pigmented insulating plaster base for problematic substrates. BLENDA<sup>®</sup>-TEX prevents the formation of stains, gives the substrate an even absorbency and grip and thus facilitates improved application of the application plaster. The insulating effect is excellent for residues of nicotine, soot, tar, grease, water stains, fire damage, felt-tip pens, etc. as well as for blocking wood ingredients. BLENDA<sup>®</sup>-TEX has a good adhesion and hardening effect, is block resistant and non-yellowing.

### Field of application

As a non-slip plaster primer on smooth, no longer highly absorbent surfaces such as gypsum, cement, concrete, sand-lime brick, cement-fibre boards, wood boards, polystyrene, various building boards, etc. and as an adhesion bridge on old coatings.

### Pretreatment

The substrate must be clean, dry, load bearing and sufficiently hardened. In case of very sandy and unsafe surfaces, apply a primer coat of BLENDA<sup>®</sup>-XIT deep penetrating primer WV-224 or DUROX deep penetrating primer.

### Processing

Do not use below 8 °C.

### System structure

#### **Highly absorbent substrate**

1 x BLENDA<sup>®</sup>-XIT deep penetrating primer WV-224 colourless  
1 x BLENDA<sup>®</sup>-TEX plaster blocking primer H02 white

#### **Renovation on intact old coats**

1 x BLENDA<sup>®</sup>-TEX plaster blocking primer H02 white

### Drying

- ◆ Dust dry after about 30 minutes
  - ◆ Firm to the touch after approx. 1 hour
  - ◆ Reconditionable after 3–6 hours
- However, the best insulating effect is achieved with a waiting period of 12 hours (swelling effect).  
(depending on the temperature, application quantity, air humidity and absorbency of the substrate)

### Dilution

Water. However, apply BLENDA<sup>®</sup>-TEX as thickly and undiluted as possible.

### Extensiveness

2–3 m<sup>2</sup> per kg per application, depending on the quantity applied and the condition of the substrate.

### Application



Brush, roller or spray gun.  
In order to achieve optimum results, it is very important to use the right tools – see KNUCHEL GUIDE on brush and roller qualities. You will find this guide both in the catalogue and on the homepage as an attachment to this product.

### Cleaning

Clean tools with warm water immediately after use. Dried-in residues can only be removed with cleaning thinner or brush cleaner.

### Delivery form

Packages of 20 and 6 kg as well as 750ml.

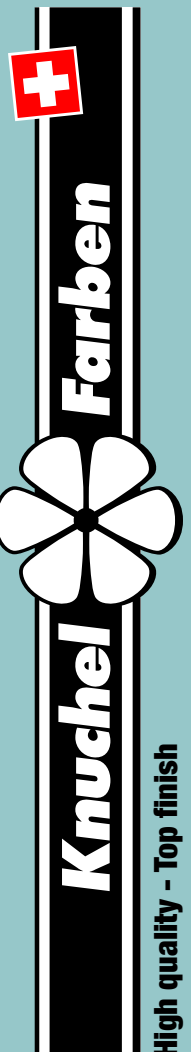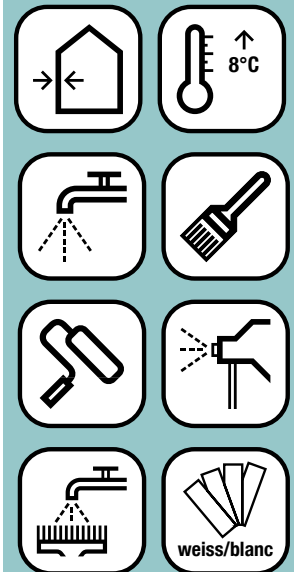

<b>Shelf life</b>	BLENDA <sup>®</sup> -TEX can be stored for at least 18 months in the well closed original container. Store in a cool but frost-free place. Diluted material reduces the shelf life, depending on the degree of dilution and water quality.
<b>Viscosity</b>	Thixotrope / 5850–7150 mPa.s
<b>Density</b>	1,50 ± 0,05 g/cm <sup>3</sup>
<b>Solid content</b>	60 ± 1 %
<b>Binder base</b>	Stabilised pure acrylate
<b>Pigment base</b>	Titanium dioxide
<b>Fillers</b>	Mineral fillers
<b>Gloss level</b>	Silk matt
<b>Colours</b>	White
<b>Registration</b>	CPID 277098
<b>Classification</b>	For information on chemical properties and hazards as well as regulations regarding transport, processing, storage, disposal, etc., please refer to the safety data sheet.
<b>Trademark</b>	BLENDA <sup>®</sup> is a registered trademark of Knuchel Farben AG in CH-Wiedlisbach.
<b>Note</b>	<p>This leaflet is only intended as a reference and non-binding advice. The processing must be adapted to the corresponding conditions. In special cases we recommend to contact our technical service. However, all data and information on the suitability and application of the delivered products do not exempt the processor from carrying out his own tests and trials. A claim for damages for omitted, incomplete or incorrect information is excluded. This applies in particular also if other products are used in the paint build-up system.</p> <p>Furthermore, we refer to our General Terms and Conditions (GTC) on our homepage.</p>