

ELOTOP



Art. 563 / 2 / 0223

Silicone plaster primer type SCW

VFL
Vismara Farbladen



Properties	ELOTOP is a white pigmented primer based on a silicone resin emulsion combined with a polymer dispersion. ELOTOP levels unevenly absorbent surfaces, increases the adhesive strength and prevents the surface from shimmering through thanks to the pigmentation. ELOTOP binds chalky old coats of paint, protects against efflorescence and algae growth and prevents the penetration of moisture without reducing the water vapour permeability.
Field of application	As a water-repellent (hydrophobic) impregnating primer for absorbent and mineral substrates.
Pretreatment	The substrate must be clean, dry and load-bearing. Loose, sandy or friable substrates must be removed and pre-treated with a primer.
Processing	Do not use below 5 °C.
System structure	1 x ELOTOP silicone plaster primer type SCW
Drying	<ul style="list-style-type: none">◆ Dry after 1–3 hours◆ Can be reworked after approx. 24 hours (depending on the temperature, application quantity, air humidity and absorbency of the substrate)
Dilution	ELOTOP is ready for use and should only be stirred briefly in the kettle with the stirrer. If necessary, very little water can be added.
Extensiveness	8–10 m ² per kg per application, depending on the quantity applied and the condition of the substrate.
Application	Brush, roller or spray gun. In order to achieve optimum results, it is very important to use the right tools – see KNUCHEL GUIDE on brush and roller qualities. You will find this guide both in the catalogue and on the homepage as an attachment to this product.
Cleaning	Clean tools with warm water immediately after use.
Delivery form	Package of 20 kg.
Shelf life	ELOTOP can be stored for at least 18 months in the well closed original container. Store in a cool but frost-free place. Diluted material reduces the shelf life, depending on the degree of dilution and water quality.
Viscosity	Low viscosity
Binder base	Silicone resin emulsion with acrylic resin dispersion
Gloss level	Matt
Colours	Natural white The product can also be coloured in the colour of the finishing plaster, thus preventing the substrate from shimmering through.

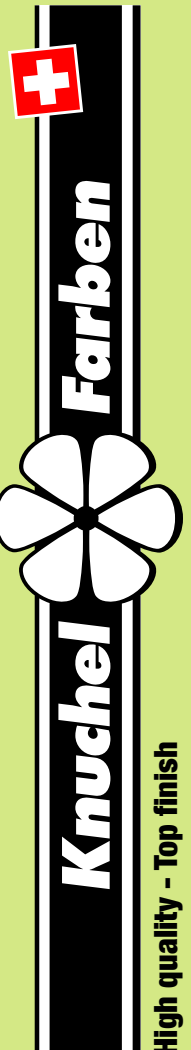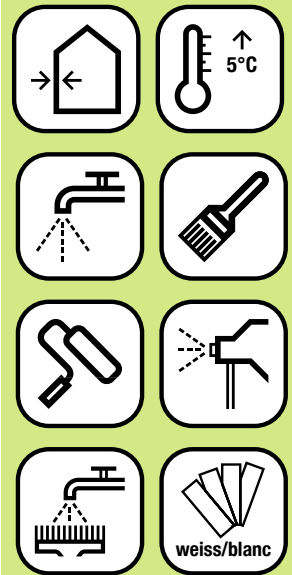

Registration	CPID 625997
Classification	For information on chemical properties and hazards as well as regulations regarding transport, processing, storage, disposal, etc., please refer to the safety data sheet.
Note	<p>This leaflet is only intended as a reference and non-binding advice. The processing must be adapted to the corresponding conditions. In special cases we recommend to contact our technical service. However, all data and information on the suitability and application of the delivered products do not exempt the processor from carrying out his own tests and trials. A claim for damages for omitted, incomplete or incorrect information is excluded. This applies in particular also if other products are used in the paint build-up system.</p> <p>Furthermore, we refer to our General Terms and Conditions (GTC) on our homepage.</p>