

BRILAFIX



Art. 567 / 1 / 1222

Bonding primer «RAPID» LH-567

VFL
Vismara Farbladen



Properties	BRILAFIX is a solvent-based, fast-drying adhesion promoter for economical renovation work in exterior and interior areas. BRILAFIX produces extremely filling, elastic and well running coatings with excellent edge coverage, high opacity and insulating effect.
Field of application	As a bonding bridge for rational renovation work and as a filling and quickly sandable intermediate coat in exterior and interior areas.
Pretreatment	The substrate must be clean, dry and free of grinding dust, oil, wax and other contaminants. It is advisable to carry out an adhesion test on uncertain surfaces, if necessary light sanding is necessary.
Processing	Do not use below 8 °C.
System structure	1 x BRILAFIX bonding primer «RAPID» LH-567 white BRILAFIX can be painted over with all commercial solvent-based and water-based alkyd and acrylic PU systems.
Drying	<ul style="list-style-type: none">◆ Dust dry after about 15 minutes◆ Firm to the touch after approx. 30 minutes◆ Recoatable after 1–2 hours◆ Grindable after 2–3 hours (depending on the temperature, application quantity and humidity)
Dilution	Universal thinner.
Extensiveness	8–10 m ² per kg per application, depending on the quantity applied and the condition of the substrate.
Application	Brush, roller or spray gun. Due to the rapid drying, brushes and rollers are only suitable for smaller surfaces. In order to achieve optimum results, it is very important to use the right tools – see KNUCHEL GUIDE on brush and roller qualities. You will find this guide both in the catalogue and on the homepage as an attachment to this product.
Cleaning	Clean tools immediately after use with paint or cleaning thinner.
Delivery form	Packages of 6 kg as well as 750ml and 375ml.
Shelf life	BRILAFIX can be stored for at least 18 months in the well closed original container. Store in a cool and dry place.
Viscosity	Slightly thixotropic / 1800–2200 mPa.s
Density	1,23 ± 0,05 g/cm ³ (white)
Solid content	62 ± 1 %
Binder base	Modified polyvinyl acetal resins

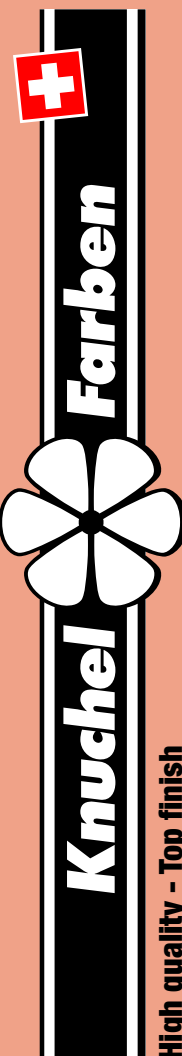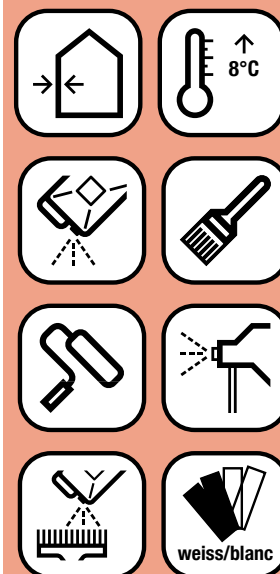

Pigment base	Titanium dioxide
Gloss level	Matt
Colours	White
Registration	CPID 277719
Classification	For information on chemical properties and hazards as well as regulations regarding transport, processing, storage, disposal, etc., please refer to the safety data sheet.
Note	<p>This leaflet is only intended as a reference and non-binding advice. The processing must be adapted to the corresponding conditions. In special cases we recommend to contact our technical service. However, all data and information on the suitability and application of the delivered products do not exempt the processor from carrying out his own tests and trials. A claim for damages for omitted, incomplete or incorrect information is excluded. This applies in particular also if thinners and other products are used in the paint build-up system.</p> <p>Furthermore, we refer to our General Terms and Conditions (GTC) on our homepage.</p>