

ELOTOP

Plaster primer R02

Art. 574 / 2 / 0223

VFL
Vismara Farbladen



Properties

ELOTOP plaster primer R02 is a fine-grained, pigmented, water-dilutable and low-odour plaster base for exterior and interior applications. It prevents the base plaster from shimmering through, gives the base an even absorbency and grip and thus facilitates regular application of the application plaster. ELOTOP increases the adhesive strength, has a water-repellent and insulating effect, prevents the risk of mold and efflorescence and extends the durability of subsequent plastic plasters.

Field of application

As a non-slip plaster primer on smooth, no longer highly absorbent surfaces such as gypsum, cement, concrete, sand-lime brick, cement-fibre boards, wood boards, polystyrene, various building boards, etc. and as an adhesion bridge on old coatings.

Pretreatment

The substrate must be clean, dry and load-bearing.

Processing

Do not use below 5 °C.

System structure

Highly absorbent substrate

1 x BLENDA®-XIT deep penetrating primer WV-224 colourless

1 x ELOTOP plaster primer R02 white

Renovation on intact old coats

1 x ELOTOP plaster primer R02 white

Drying

- ◆ Dry after 1–2 hours
- ◆ Can be reworked after approx. 12 hours
(depending on the temperature, application quantity, air humidity and absorbency of the substrate)

Dilution

ELOTOP is ready for use and should only be stirred briefly in the kettle with the stirrer. If necessary, very little water can be added.

Extensiveness

2–3 m² per kg per application, depending on the quantity applied and the condition of the substrate.

Application

Brush, roller or spray gun.

In order to achieve optimum results, it is very important to use the right tools – see KNUCHEL GUIDE on brush and roller qualities. You will find this guide both in the catalogue and on the homepage as an attachment to this product.

Cleaning

Clean tools with warm water immediately after use. Dried-in residues can only be removed with cleaning thinner or brush cleaner.

Delivery form



Package of 20 kg.

Shelf life

ELOTOP can be stored for at least 18 months in the well closed original container. Store in a cool but frost-free place. Diluted material reduces the shelf life, depending on the degree of dilution and water quality.

Viscosity

pasty

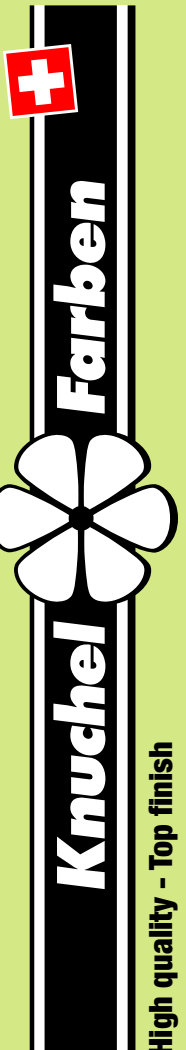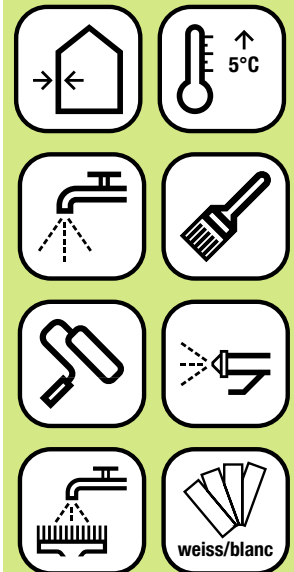

Density	1,10 ± 0,05 g/cm ³
Solid content	60 ± 1 %
Binder base	Modified acrylic resin dispersion
Pigment base	Titanium dioxide
Fillers	Mineral fillers
Gloss level	Matt
Colours	White. The product can also be coloured in the colour of the finishing plaster, thus preventing the substrate from shimmering through.
Registration	CPID 626056
Classification	For information on chemical properties and hazards as well as regulations regarding transport, processing, storage, disposal, etc., please refer to the safety data sheet.
Note	<p>This leaflet is only intended as a reference and non-binding advice. The processing must be adapted to the corresponding conditions. In special cases we recommend to contact our technical service. However, all data and information on the suitability and application of the delivered products do not exempt the processor from carrying out his own tests and trials. A claim for damages for omitted, incomplete or incorrect information is excluded. This applies in particular also if other products are used in the paint build-up system.</p> <p>Furthermore, we refer to our General Terms and Conditions (GTC) on our homepage.</p>