

# ENICTOL


## Screw lock lacquer

Art. 643 / 6 / 0323

VFL  
Vismara Farbladen



<b>Properties</b>	ENICTOL is a mineral oil resistant locking varnish and is used to fix tightened screws and to check that the relevant components are not changed after assembly. Threaded pins that are countersunk in holes are also marked with ENICTOL screw lock lacquer. ENICTOL has a temperature resistance from minus 25 °C to plus 85 °C.
<b>Pretreatment</b>	The substrate must be clean, dry and free of oil, grease and wax.
<b>Drying</b>	<ul style="list-style-type: none"><li>◆ Firm to the touch after 5–10 minutes</li><li>◆ Thoroughly dried after 30–60 minutes</li></ul>
<b>Dilution</b>	Nitro or universal thinner.
<b>Application</b>	Brushes
<b>Cleaning</b>	Clean tools immediately after use with universal or cleaning thinner.
<b>Delivery form</b>	Packages of 5 and 1 kg as well as 125ml.
<b>Shelf life</b>	ENICTOL can be stored for at least 18 months in the well closed original container. Store in a cool and dry place.
<b>Viscosity</b>	Slightly thixotropic / 420–480 mPa.s
<b>Density</b>	1,05 ± 0,05 g/cm <sup>3</sup> (average value, depending on the colour tone)
<b>Solid content</b>	50 ± 1 % (average value, depending on the colour tone)
<b>Binder base</b>	Modified nitrocellulose and alkyd resins
<b>Pigment base</b>	Titanium dioxide, inorganic and organic coloured pigments.
<b>Gloss level</b>	Silky Gloss
<b>Colours</b>	White, black, yellow, red, green and blue.
<b>Registration</b>	CPID 622098
<b>Classification</b>	For information on chemical properties and hazards as well as regulations regarding transport, processing, storage, disposal, etc., please refer to the safety data sheet.
<b>Note</b>	This applies in particular also if thinners and other products are used in the paint build-up system. This leaflet is only intended as a reference and non-binding advice. The processing must be adapted to the corresponding conditions. In special cases we recommend to contact our technical service. However, all data and information on the suitability and application of the delivered products do not exempt the processor from carrying out his own tests and trials. A claim for damages for omitted, incomplete or incorrect information is excluded.

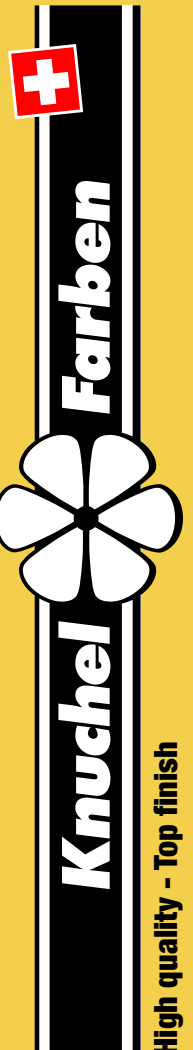

Furthermore, we refer to our General Terms and Conditions (GTC) on our homepage.