

ACRYL-PRIMER


Art. 721 / 9 / 0423

Universal primer spray


VFL
Vismara Farbladen



Properties	Quick-drying Universal primer spray with outstanding corrosion protection and excellent adhesion properties.
Field of application	ACRYL-PRIMER universal primer spray is suitable for use on ground or bare metal parts as well as on wood, glass, ceramics, stone and certain plastics.
Pretreatment	The substrate must be clean, dry and free of grease. Clean old paintwork well, sand and, if necessary, derust and fill in. Carefully cover areas not to be sprayed.
Processing	Avoid sun and wind. Shake the can before use until the balls move audibly for about 20 seconds. Shake well even when working in between. Spray thin layers in the cloister.
Drying	<ul style="list-style-type: none">◆ Dust dry after 10–20 minutes◆ Firm to the touch after approx. 30 minutes◆ Sandable and recoatable with all commercial products after 1–2 hours.
Extensiveness	1–2 m ² , depending on the colour shade, the quantity applied and the condition of the substrate.
Cleaning	With self-cleaning special valve. It is no longer necessary to reverse the can after use to clean the valve by means of gas leakage.
Delivery form	Aerosol cans of 400ml.
Shelf life	ACRYL-PRIMER can be stored for at least 24 months in the well closed original container.
Gloss level	Matt
Colours	No. 20 white, No. 21 grey, No. 22 red-brown, No. black
Registration	CPID 627728
Classification	For information on chemical properties and hazards as well as regulations regarding transport, processing, storage, disposal, etc., please refer to the safety data sheet.
Note	This leaflet is only intended as a reference and non-binding advice. The processing must be adapted to the corresponding conditions. In special cases we recommend to contact our technical service. However, all data and information on the suitability and application of the delivered products do not exempt the processor from carrying out his own tests and trials. A claim for damages for omitted, incomplete or incorrect information is excluded. This applies in particular also if other products are used in the paint build-up system. Furthermore, we refer to our General Terms and Conditions (GTC) on our homepage.

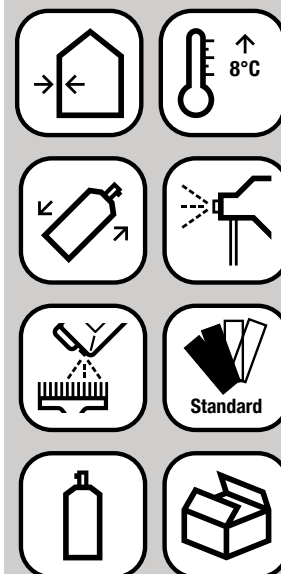

Farben



Knuchel

High quality - Top finish