

SPOT-FILLER


Filler & primer Spray

Art. 736 / 9 / 0423


VFL
Vismara Farbladen



Properties	Combination of primer and filler. Fast drying, high filling and covering power, rapid sanding and excellent adhesion.
Field of application	SPOT-FILLER filler & primer Spray is suitable for use on ground or bare metal parts as well as on wood, glass, ceramics, stone and certain plastics.
Pretreatment	The substrate must be clean, dry and free of grease. Clean old paintwork well, sand and, if necessary, derust and fill in. Carefully cover areas not to be sprayed.
Processing	Avoid sun and wind. Shake the can before use until the balls move audibly for about 20 seconds. Shake well even when working in between. Spray distance 25–30cm. Spray thin layers in the cloister.
Drying	<ul style="list-style-type: none">◆ Dust dry after 10–20 minutes◆ Firm to the touch after approx. 30 minutes◆ Sandable and recoatable with all commercial products after 1–2 hours.
Extensiveness	0,5–1,5 m ² , depending on the quantity applied and the condition of the substrate.
Cleaning	With self-cleaning special valve. It is no longer necessary to reverse the can after use to clean the valve by means of gas leakage.
Delivery form	Aerosol cans of 400ml.
Shelf life	SPOT-FILLER can be stored for at least 24 months in the well closed original container.
Gloss level	Matt
Colours	Grey
Registration	CPID 627773
Classification	For information on chemical properties and hazards as well as regulations regarding transport, processing, storage, disposal, etc., please refer to the safety data sheet.
Note	This leaflet is only intended as a reference and non-binding advice. The processing must be adapted to the corresponding conditions. In special cases we recommend to contact our technical service. However, all data and information on the suitability and application of the delivered products do not exempt the processor from carrying out his own tests and trials. A claim for damages for omitted, incomplete or incorrect information is excluded. This applies in particular also if thinners and other products are used in the paint build-up system. Furthermore, we refer to our General Terms and Conditions (GTC) on our homepage.

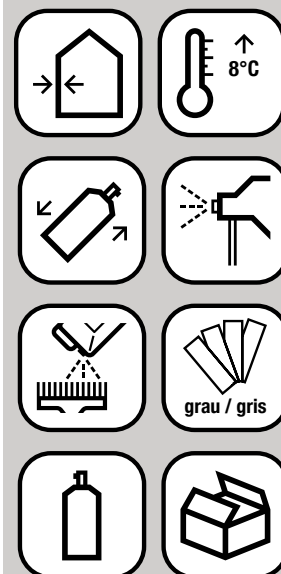

Farben



Knuchel

High quality - Top finish