

# HI-TEMP


Art. 741 / 9 / 0423

## High temperature spray 650 °C


VFL  
Vismara Farbladen



<b>Properties</b>	The special highly heat-resistant silicone resin varnish forms a hard and durable surface that does not burn, flake or flake off. Very good direct adhesion with high rust protection and weather resistance.
<b>Pretreatment</b>	The substrate must be clean, dry and free of grease. Difficult substrates such as brightly polished parts should first be dusted, mechanically roughened or chemically pre-treated. Rusty parts must be cleaned thoroughly. Carefully cover areas not to be sprayed.
<b>Processing</b>	<p>HI-TEMP is applied in one or two thin layers without priming. Excessive layer thicknesses are detrimental to heat resistance. In order to achieve heat resistance and to avoid unpleasant odours during full commissioning, the painted objects must be slightly warmed beforehand (ensure good ventilation indoors) so that all solvents can escape.</p> <p>Avoid sun and wind. Shake the can before use until the balls move audibly for about 20 seconds. Shake well even when working in between. Spray distance 25–30cm. Spray thin layers in the cloister.</p>
<b>Drying</b>	<ul style="list-style-type: none"><li>◆ Dust dry after 10–20 minutes</li><li>◆ Firm to the touch after approx. 30 minutes</li><li>◆ Fully dried after about 2 hours</li></ul>
<b>Extensiveness</b>	1–2 m <sup>2</sup> , depending on the colour shade, the quantity applied and the condition of the substrate.
<b>Cleaning</b>	With self-cleaning special valve. It is no longer necessary to reverse the can after use to clean the valve by means of gas leakage.
<b>Delivery form</b>	Aerosol cans of 400ml.
<b>Shelf life</b>	HI-TEMP can be stored for at least 24 months in the well closed original container.
<b>Gloss level</b>	Matt
<b>Colours</b>	No. 30 anthracite, No. 31 black, No. 32 silver, No. 33 colourless, No. 36 white, No. 40 red.
<b>Registration</b>	CPID 127929
<b>Classification</b>	For information on chemical properties and hazards as well as regulations regarding transport, processing, storage, disposal, etc., please refer to the safety data sheet.
<b>Note</b>	This leaflet is only intended as a reference and non-binding advice. The processing must be adapted to the corresponding conditions. In special cases we recommend to contact our technical service. However, all data and information on the suitability and application of the delivered products do not exempt the processor from carrying out his own tests and trials. A claim for damages for omitted, incomplete or incorrect information is excluded. This applies in particular also if thinners and other products are used in the paint build-up system.

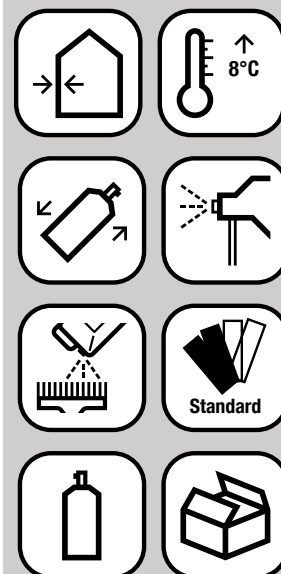

Farben



Knuchel

High quality - Top finish

Furthermore, we refer to our General Terms and Conditions (GTC) on our homepage.