

# ACRYL-RACE


Art. 745 / 9 / 0423

## Rim spray


VFL  
Vismara Farbladen



<b>Properties</b>	High-quality acrylic effect paint for metal rims and as a universal decorative paint. Very good covering, adhesive, scratch-resistant and weather-resistant quality varnish with rust inhibitors.
<b>Pretreatment</b>	Remove grease, dirt and rust. If necessary, apply an anti-rust primer (SUPER-PRIMER primer spray, ACRYL-PRIMER universal primer spray). Carefully cover areas not to be sprayed.
<b>Processing</b>	Avoid sun and wind. Shake the can before use until the balls move audibly for about 20 seconds. Shake well even when working in between. Spray distance 25–30cm. Spray thin layers in the cloister. Wait a few minutes after each shift, but no longer than 30 minutes. Spray sample: Test paint compatibility on inconspicuous side.
<b>System structure</b>	Recoatable with ACRYL-COLOR colourless.
<b>Drying</b>	<ul style="list-style-type: none"><li>◆ Dust dry after 10–20 minutes</li><li>◆ Firm to the touch after approx. 30 minutes</li><li>◆ Fully dried after about 2 hours</li></ul>
<b>Extensiveness</b>	1–2 m <sup>2</sup> , depending on the colour shade, the quantity applied and the condition of the substrate.
<b>Cleaning</b>	With self-cleaning special valve. It is no longer necessary to reverse the can after use to clean the valve by means of gas leakage.
<b>Delivery form</b>	Aerosol cans of 400ml.
<b>Shelf life</b>	ACRYL-RACE can be stored for at least 24 months in the well closed original container.
<b>Gloss level</b>	Gloss
<b>Colours</b>	No. 68 silver
<b>Registration</b>	CPID 623123
<b>Classification</b>	For information on chemical properties and hazards as well as regulations regarding transport, processing, storage, disposal, etc., please refer to the safety data sheet.
<b>Note</b>	This leaflet is only intended as a reference and non-binding advice. The processing must be adapted to the corresponding conditions. In special cases we recommend to contact our technical service. However, all data and information on the suitability and application of the delivered products do not exempt the processor from carrying out his own tests and trials. A claim for damages for omitted, incomplete or incorrect information is excluded. This applies in particular also if other products are used in the paint build-up system. Furthermore, we refer to our General Terms and Conditions (GTC) on our homepage.

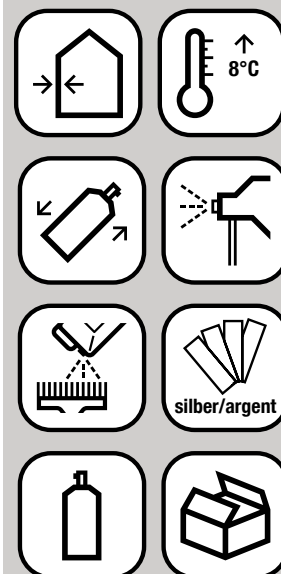

Farben



Knuchel

High quality - Top finish