

ALU-ZINK


Spray

Art. 747 / 9 / 0423


VFL
Vismara Farbladen



Properties	Provides aluminium-coloured long-term protection against rust and corrosion with one coat. Contains 99,5 % pure zinc tempered with pure aluminium and reaches a heat resistance up to 300 °C.
Field of application	ALU-ZINK spray is suitable for repairing and colour matching of galvanized parts, aluminium, etc. and as silver-coloured corrosion protection for all metallic surfaces.
Pretreatment	The substrate must be clean, dry and free of grease. Sand-blasted surfaces (SA 2½) offer the best guarantee for good adhesion of the coating. Difficult substrates such as brightly polished parts should first be dusted, mechanically roughened or chemically pre-treated. Rusty parts must be cleaned thoroughly. Carefully cover areas not to be sprayed.
Processing	Avoid sun and wind. Shake the can before use until the balls move audibly for about 20 seconds. Shake well even when working in between. Spray distance 25–30cm. Spray thin layers in the cloister. Multiple coating after 5 minutes.
Drying	<ul style="list-style-type: none">◆ Dust dry after 20–30 minutes◆ Firm to the touch after approx. 1 hour◆ Recoatable after 2–3 hours
Extensiveness	0,5–1,5 m ² , depending on the quantity applied and the condition of the substrate.
Cleaning	With self-cleaning special valve. It is no longer necessary to reverse the can after use to clean the valve by means of gas leakage.
Delivery form	Aerosol cans of 400ml.
Shelf life	ALU-ZINK can be stored for at least 24 months in the well closed original container.
Gloss level	Silk matt
Colours	Silver
Registration	CPID 215377
Classification	For information on chemical properties and hazards as well as regulations regarding transport, processing, storage, disposal, etc., please refer to the safety data sheet.
Note	This leaflet is only intended as a reference and non-binding advice. The processing must be adapted to the corresponding conditions. In special cases we recommend to contact our technical service. However, all data and information on the suitability and application of the delivered products do not exempt the processor from carrying out his own tests and trials. A claim for damages for omitted, incomplete or incorrect information is excluded. This applies in particular also if other products are used in the paint build-up system.

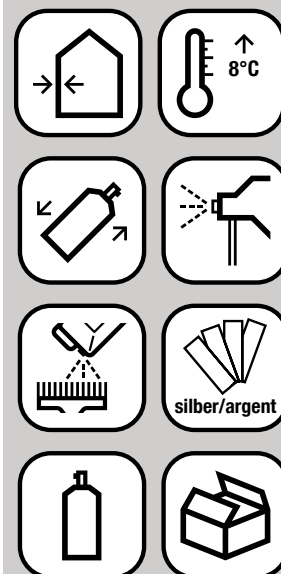

Farben



Knuchel

High quality - Top finish

Furthermore, we refer to our General Terms and Conditions (GTC) on our homepage.