

MET-FLAKE


Art. 766 / 9 / 0423

Effect spray


VFL
Vismara Farbladen



| | |
|-----------------------------|---|
| Properties | MET-FLAKE is an extremely decorative and hard-wearing effect paint with coarse aluminium flakes. |
| Field of application | It is suitable for high-quality paintwork on machine and vehicle parts and as a universal decorative paint on metal and wood. |
| Pretreatment | Remove grease, dirt and rust. If necessary, apply an anti-rust primer (SUPER-PRIMER primer spray, ACRYL-PRIMER universal primer spray). Carefully cover areas not to be sprayed. |
| Processing | Avoid sun and wind. Shake the can before use until the balls move audibly for about 20 seconds. Shake well even when working in between. Spray sample: Test paint compatibility on inconspicuous side. Spray distance 25–30cm. Spray thin layers in the cloister. Wait a few minutes after each shift, but no longer than 30 minutes. |
| System structure | To protect the metallic effect from oxidation, a clear varnish should be sprayed over for outdoor use. |
| Drying | <ul style="list-style-type: none">◆ Dust dry after 10–20 minutes◆ Firm to the touch after approx. 30 minutes◆ Fully dried after about 2 hours |
| Extensiveness | 1–2 m ² , depending on the colour shade, the quantity applied and the condition of the substrate. |
| Cleaning | With self-cleaning special valve. It is no longer necessary to reverse the can after use to clean the valve by means of gas leakage. |
| Delivery form | Aerosol cans of 400ml. |
| Shelf life | MET-FLAKE can be stored for at least 12 months in the well closed original container. |
| Gloss level | Gloss |
| Colours | No. 70 red, No. 71 blue, No. 72 green, No. 73 violet, No. 74 black, No. 75 silver. |
| Registration | CPID 627810 |
| Classification | For information on chemical properties and hazards as well as regulations regarding transport, processing, storage, disposal, etc., please refer to the safety data sheet. |

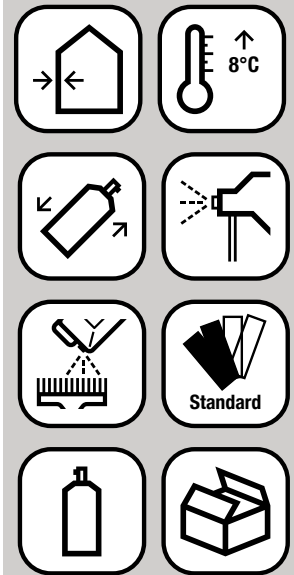

Farben



Knuchel

High quality - Top finish

Note

This leaflet is only intended as a reference and non-binding advice. The processing must be adapted to the corresponding conditions. In special cases we recommend to contact our technical service. However, all data and information on the suitability and application of the delivered products do not exempt the processor from carrying out his own tests and trials. A claim for damages for omitted, incomplete or incorrect information is excluded. This applies in particular also if other products are used in the paint build-up system.

Furthermore, we refer to our General Terms and Conditions (GTC) on our homepage.