

CREATEX

Wall covering adhesive

Art. 845 / 8 / 0423

VFL
Vismara Farbladen



Properties

CREATEX is a water-thinnable and fast-drying colourless wallpaper primer for absorbent as well as problematic substrates. It strengthens the adhesion of the wallpaper and helps to prevent wallpaper peeling. CREATEX shows a very high penetration depth, consolidates the substrate to be wallpapered and regulates the absorbency. Does not attack solvent-sensitive polystyrene thermal insulation boards.

Field of application

- ◆ For optimum substrate preparation before wallpapering.
- ◆ Suitable for fixing flaky, sandy and strongly or irregularly absorbent mineral substrates.

Pretreatment

The substrate must be clean, dry and load-bearing.

Processing

Do not use below 8 °C.

System structure

Highly absorbent substrate

1–2 x CREATEX wall covering adhesive colourless undiluted

Weakly absorbent substrate

1 x CREATEX wall covering adhesive colourless diluted with up to 50
The dilution must be adapted to the absorbency of the substrate.

Drying

- ◆ Dry after 1–2 hours
- ◆ Reconditionable after 4–6 hours
(depending on the temperature, application quantity, air humidity and absorbency of the substrate)

Dilution

Water.

Extensiveness

8–12 m² per kg per application, depending on the quantity applied and the condition of the substrate.

Application

Brush, roller or spray gun.

In order to achieve optimum results, it is very important to use the right tools – see KNUCHEL GUIDE on brush and roller qualities. You will find this guide both in the catalogue and on the homepage as an attachment to this product.

Cleaning

Clean tools with warm water immediately after use. Dried-in residues can only be removed with cleaning thinner or brush cleaner.

Delivery form

Package of 10 litres.

Shelf life


CREATEX can be stored for at least 18 months in the well closed original container. Store in a cool but frost-free place. Diluted material reduces the shelf life, depending on the degree of dilution and water quality.

Viscosity

Low viscosity

Density

1,00 ± 0,05 g/cm³

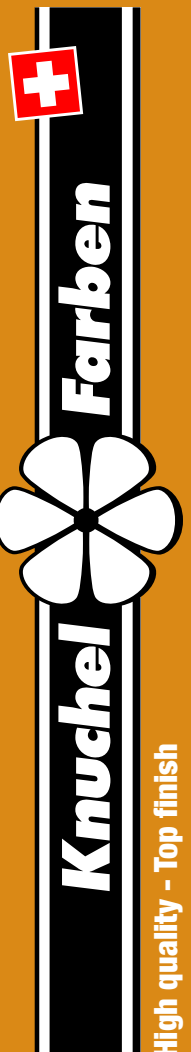

Solid content	18,5 ± 1 %
Binder base	Nanoscale acrylic resin dispersions
Gloss level	Silk matt (depending on the absorbency of the substrate).
Colours	Colourless
Registration	CPID 000000
Classification	For information on chemical properties and hazards as well as regulations regarding transport, processing, storage, disposal, etc., please refer to the safety data sheet.
Note	<p>This leaflet is only intended as a reference and non-binding advice. The processing must be adapted to the corresponding conditions. In special cases we recommend to contact our technical service. However, all data and information on the suitability and application of the delivered products do not exempt the processor from carrying out his own tests and trials. A claim for damages for omitted, incomplete or incorrect information is excluded. This applies in particular also if other products are used in the paint build-up system.</p> <p>Furthermore, we refer to our General Terms and Conditions (GTC) on our homepage.</p>