

# BRICAPON


## Zapon varnish

Art. 88 / 12 / 0823


VFL  
Vismara Farbladen



<b>Properties</b>	BRICAPON is a fast-drying and transparent metal preservative paint based on modified acrylic resins. BRICAPON protects non-ferrous metals permanently against oxidation, corrosion and discoloration and has excellent adhesion, weather resistance and non-yellowing properties.
<b>Field of application</b>	As a protective coating against oxidation of non-ferrous metals such as copper, brass, chrome, aluminium, tin, zinc, etc. Also on ferrous metals in interior areas with sufficient layer thickness. Due to the low solids content, application outdoors as a sole colourless anti-corrosion coating is not recommended.
<b>Pretreatment</b>	The substrate must be clean, dry and free of oil, grease and wax. BRICAPON can be applied directly to the various substrates. Tarnished, discoloured or oxidised metal surfaces must be cleaned metallically bright and washed with solvent. For application on painted surfaces, a preliminary test of compatibility (dissolving effect) is essential.
<b>Processing</b>	Do not use below 5 °C. Spray viscosity 18–25 seconds in DIN-4 cup.
<b>System structure</b>	2–3 x BRICAPON zapon varnish colourless
<b>Drying</b>	<ul style="list-style-type: none"><li>◆ Dust dry after about 20 minutes</li><li>◆ Firm to the touch after approx. 45 minutes</li><li>◆ Recoatable after 1–2 hours</li><li>◆ Fully dried after about 24 hours (depending on the temperature, application quantity and humidity)</li></ul>
<b>Dilution</b>	Universal thinner.
<b>Extensiveness</b>	10–15 m <sup>2</sup> per litre and application.
<b>Application</b>	Spray gun, immersion bath or brush (smaller areas). In order to achieve optimum results, it is very important to use the right tools – see KNUCHEL GUIDE on brush and roller qualities. You will find this guide both in the catalogue and on the homepage as an attachment to this product.
<b>Cleaning</b>	Clean tools immediately after use with universal or cleaning thinner.
<b>Delivery form</b>	Packages of 5 litres as well as 750ml, 375ml and 125ml.
<b>Shelf life</b>	BRICAPON can be stored for at least 18 months in the well closed original container. Storage beyond this specified period does not necessarily mean that the goods are unusable. However, for quality assurance reasons, it is essential to check the required property values. Store in a cool and dry place.
<b>Viscosity</b>	14–22 seconds DIN 4mm
<b>Density</b>	0,90 ± 0,05 g/cm <sup>3</sup>

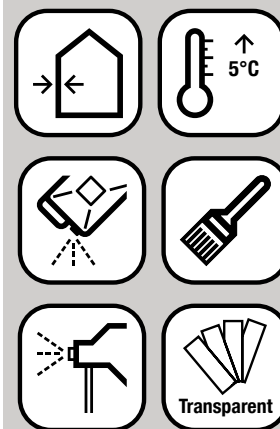

Farben



Knuchel

High quality – Top finish

<b>Solid content</b>	23,5 ± 1 %
<b>Binder base</b>	Modified acrylic resin dispersion
<b>Gloss level</b>	Gloss
<b>Colours</b>	Transparent, water light.
<b>Registration</b>	CPID 276763
<b>Classification</b>	For information on chemical properties and hazards as well as regulations regarding transport, processing, storage, disposal, etc., please refer to the safety data sheet.
<b>Note</b>	<p>This leaflet is only intended as a reference and non-binding advice. The processing must be adapted to the corresponding conditions. In special cases we recommend to contact our technical service. However, all data and information on the suitability and application of the delivered products do not exempt the processor from carrying out his own tests and trials. A claim for damages for omitted, incomplete or incorrect information is excluded. This applies in particular also if thinners and other products are used in the paint build-up system.</p> <p>Furthermore, we refer to our General Terms and Conditions (GTC) on our homepage.</p>