

# BRICACRYL

## Acrylic clear coat

Art. 89 / 12 / 0823

VFL  
Vismara Farbladen



### Properties

BRICACRYL is a fast-drying and transparent metal preservative paint based on modified acrylic resins. BRICACRYL protects non-ferrous metals permanently against oxidation, corrosion and discoloration and has excellent adhesion, weather resistance and non-yellowing properties.

### Field of application

- As a protective coating against oxidation of non-ferrous metals such as copper, brass, chrome, aluminium, tin, zinc, etc.  
Also on ferrous metals in interior areas with sufficient layer thickness. Due to the low solids content, application outdoors as a sole colourless anti-corrosion coating is not recommended.
- As a protective coating on mineral substrates such as stone, concrete, etc.
- As additional protective coating on painted surfaces.

### Pretreatment

The substrate must be clean, dry and free of rust and grease. BRICACRYL can be applied directly to the various substrates. Tarnished, discoloured or oxidised metal surfaces must be cleaned metallically bright and washed with solvent. For application on painted surfaces, a preliminary test of compatibility (dissolving effect) is essential.

### Processing

Do not use below 5 °C. Spray viscosity 18–25 seconds in DIN-4 cup.

### System structure

2–3 x BRICACRYL acrylic clear coat colourless

### Drying

- ◆ Dust dry after about 30 minutes
- ◆ Firm to the touch after 1–2 hours
- ◆ Recoatable after 2–4 hours
- ◆ Fully dried after about 24 hours  
(depending on the temperature, application quantity and humidity)

### Dilution

Universal thinner.

### Extensiveness

10–15 m<sup>2</sup> per litre and application.

### Application

Spray gun, immersion bath or brush (smaller areas).  
In order to achieve optimum results, it is very important to use the right tools – see KNUCHEL GUIDE on brush and roller qualities. You will find this guide both in the catalogue and on the homepage as an attachment to this product.

### Cleaning

Clean tools immediately after use with universal or cleaning thinner.

### Delivery form


Packages of 5 litres as well as 750ml, 375ml and 125ml.

### Shelf life


BRICACRYL can be stored for at least 18 months in the well closed original container. Storage beyond this specified period does not necessarily mean that the goods are unusable. However, for quality assurance reasons, it is essential to check the required property values.

### Viscosity

28–32 seconds DIN 4mm

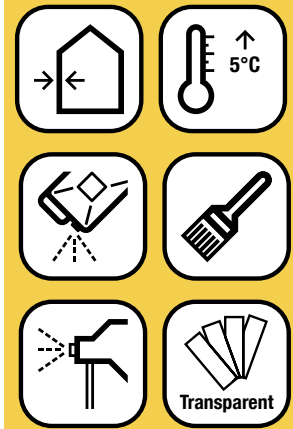

Farben



Knuchel

High quality – Top finish

<b>Solid content</b>	32 ± 1 %
<b>Binder base</b>	Modified acrylic resins
<b>Gloss level</b>	Gloss
<b>Colours</b>	Transparent, water light.
<b>Registration</b>	CPID 279827
<b>Classification</b>	For information on chemical properties and hazards as well as regulations regarding transport, processing, storage, disposal, etc., please refer to the safety data sheet.
<b>Note</b>	<p>This leaflet is only intended as a reference and non-binding advice. The processing must be adapted to the corresponding conditions. In special cases we recommend to contact our technical service. However, all data and information on the suitability and application of the delivered products do not exempt the processor from carrying out his own tests and trials. A claim for damages for omitted, incomplete or incorrect information is excluded. This applies in particular also if thinners and other products are used in the paint build-up system.</p> <p>Furthermore, we refer to our General Terms and Conditions (GTC) on our homepage.</p>