## **WENGE**

## Impregnating oil food safe

Art. 621 / 15 / 0423





Properties WENGE is a food-safe, open-pored, water-repellent and moisture-regulating

wood care oil for interior woods. WENGE nourishes and cares for the wood,

refreshes dull and faded surfaces and revives the wood grain.

**Pretreatment** First clean contaminated surfaces thoroughly and allow to dry. The substrate

must be clean, dry and free of grease.

**Processing** Shake the jug well before use. WENGE is applied sparingly and regularly in the

grain direction of the wood with a white, lint-free cloth (bale) or brush. After about one hour, polish the wood briefly or distribute and remove the oil that has

not been absorbed into the wood.

**System structure** 1–2 x WENGE impregnating oil food safe colourless depending on the absorbency

of the wood WENGE impregnating oil food safe

**Drying** ◆ Firm to the touch after 1–3 hours

(depending on the quantity applied and the absorbency of the substrate)

**Dilution** WENGE is adjusted ready for use.

**Extensiveness** 15–20 m² per litre per application, depending on the quantity applied and the

condition of the substrate.

**Application** Cloth or brush.

In order to achieve optimum results, it is very important to use the right tools — see KNUCHEL GUIDE on brush and roller qualities. You will find this guide both in the part of the barrance as a part of the barrance and the barrance are a second at the barrance and the barrance are a second at the barranc

in the catalogue and on the homepage as an attachment to this product.

**Clean tools immediately after use with turpentine substitute, universal thinner** 

or cleaning thinner.

**Delivery form** Packages of 5 litres as well as 1000ml and 500ml.

**Shelf life** WENGE can be stored for at least 18 months in the well closed original container.

Store in a cool and dry place.

Viscosity Low viscosity / 25–40mm²/s @40 °C

**Density**  $0.85 \pm 0.05 \text{ g/cm}^3$ 

Solid content 100 %


**Binder base** Paraffin Oils

**Gloss level** Matt, silky lustre through polishing

**Colours** Colourless

**Registration** CPID 277657



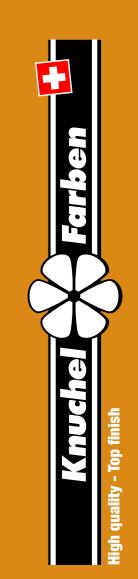





Classification

For information on chemical properties and hazards as well as regulations regarding transport, processing, storage, disposal, etc., please refer to the safety data sheet.

**Note** 

This leaflet is only intended as a reference and non-binding advice. The processing must be adapted to the corresponding conditions. In special cases we recommend to contact our technical service. However, all data and information on the suitability and application of the delivered products do not exempt the processor from carrying out his own tests and trials. A claim for damages for omitted, incomplete or incorrect information is excluded.

Furthermore, we refer to our General Terms and Conditions (GTC) on our homepage.