

# PATINA

## Iron mica spray 2 in 1

Art. 778 / 9 / 0423

**VFL**  
Vismara Farbladen



### Properties

PATINA is a quick-drying, highly weather-resistant and viscoplastic thick-film plastic paint for the surface protection of iron railings, hand-forged ironwork and all kinds of iron constructions. Due to the micaceous iron ore content, PATINA offers excellent corrosion protection with outstanding impact and shock resistance. PATINA is black metallized and produces a very beautiful and durable silver-black patina effect in one step.

### Pretreatment

Remove grease, dirt and rust. If necessary, apply an anti-rust primer (SUPER-PRIMER primer spray, ACRYL-PRIMER universal primer spray). Carefully cover areas not to be sprayed.

### Processing

Avoid sun and wind. Shake the can before use until the balls move audibly for about 20 seconds. Shake well even when working in between. Spray distance 25–30cm. Spray thin layers in the cloister. Wait a few minutes after each shift, but no longer than 30 minutes.

### Drying

- ◆ Dust dry after 20–30 minutes
- ◆ Firm to the touch after approx. 1 hour
- ◆ Fully dried after about 6 hours

### Extensiveness

0,5–1,5 m<sup>2</sup>, depending on the colour shade, the quantity applied and the condition of the substrate.

### Cleaning

With self-cleaning special valve. It is no longer necessary to reverse the can after use to clean the valve by means of gas leakage.

### Delivery form

Aerosol cans of 400ml.

### Shelf life

PATINA can be stored for at least 24 months in the well closed original container.

### Gloss level

Matt

### Colours

No. 50 grey, No. 51 anthracite

### Registration

CPID 627814


### Classification

For information on chemical properties and hazards as well as regulations regarding transport, processing, storage, disposal, etc., please refer to the safety data sheet.


### Note

This leaflet is only intended as a reference and non-binding advice. The processing must be adapted to the corresponding conditions. In special cases we recommend to contact our technical service. However, all data and information on the suitability and application of the delivered products do not exempt the processor from carrying out his own tests and trials. A claim for damages for omitted, incomplete or incorrect information is excluded. This applies in particular also if other products are used in the paint build-up system.

Furthermore, we refer to our General Terms and Conditions (GTC) on our homepage.

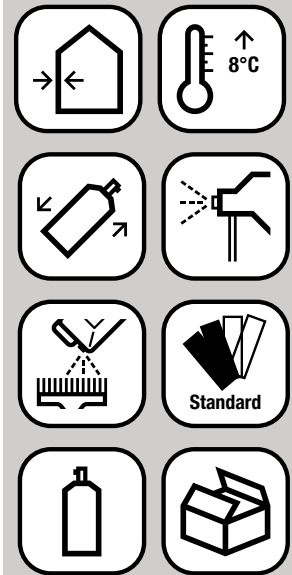

**Farben**



**Knuchel**

High quality - Top finish